

REPAINT

www.repaintweb.com

FLEX PAINT FOR P.V.C

FLEXIBLE PAINT

Product Information | TECHNICAL DATA SHEET

DESCRIPTION AND FEATURES:

Repaint is a flexible acrylic spray paint for all kind of PVC, hypalon or neoprene surfaces. Specially formulated for outdoor surfaces, resists rubbing and frictions as well as sunlight exposure. No primer needed. Will not rub off once dry and offers an extra protection against dirt and humidity. Fast drying, excellent flexibility, total adhesion and great durability. Good covering capability, easy to apply and repaint. Recommended use for damage, old and deteriorated surfaces.

INSTRUCTIONS FOR USE:

- Shake the aerosol well before using it, approximately for 2 min after hearing the sound of the mixer.
- Softly sand the surface with a thin san paper.
- Apply on dry and clean surfaces.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use. If the nozzle becomes blocked replace it with a new one.
- Apply in well ventilated areas.



15 – 18° FORD Nº4



Thinner 0%



20-25 my



30' Not Sticky

PHYSICAL PROPERTIES:

20°C Density (g/cc)	0.50 – 1.12
Fineness of Grind	10 - 15
Supply viscosity at 20°C	100-130sec. Ford Cup nº4
Non volatile Matter % (w/v)	40-50 % weight; 30-35 % vol.
V.O.C (g/l)	696 (Ready to use)-(2004/42/CE) IIB (E) (840)
Product Type	Acrylic
Color	s/m REPAINT
Theoretical Yield	13-14 25 my – 2,8 m ² for 400 ml
Gloss 60°	40 – 60°
Repaint	30 min.
Dry to the touch	15 min.
Completely dry	36 hours.
Product life	2 years

By mixing (in weight) with universal Matting, it can achieve lower levels of brightness. Gloss values listed in this table are approximate.

STORAGE:

Keep in a cool and ventilated place. Temperature between 5°C and 30°C. Do not expose to direct sun light. Do not store it next to a source of heat or fire. Keep away from children.


REF.	PRODUCT	COLOUR	RAL CODE	CAPACITY
RPF000	REPAINT	WHITE	9003	400ml
RPFY999	REPAINT	BLACK	9004	400ml
RPFC287	REPAINT	RED	3020	400ml
RPFC540	REPAINT	BLUE	5005	400ml
RPF056	REPAINT	IVORY	1014	400ml
RPFK724	REPAINT	GREY	7047	400ml

APPLICATIONS:

Specially developed for:

- Inflatable boats
- Upholstery and cushions
- Awnings
- Fenders

APPEARANCE:

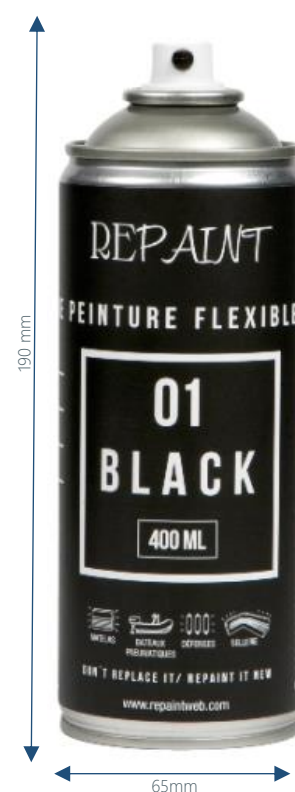

CAUTION:



Extremely Flammable aerosol.
Harmful if inhaled
Causes skin and eye irritation.

PACKAGING:

Nominal Capacity: 400ml
Packaging heat resistance: <50°C
Box: 12 units